



**KANEX**<sup>®</sup>

**KITCHEN**

**FIRE  
SUPPRESSION  
SYSTEM**

# Pre-Engineered Commercial Kitchen Fire suppression system

Research shows Commercial kitchen fires consistently rank among the leading causes of commercial and residential fires, most of the fire start with improper handling of kitchen food like Fatty oil, resulting in death, injury, and significant property loss, costing money and downtime to businesses.

And there's just one way to deal with them: instant detection and swift firefighting. Our system is designed to detect and suppress at the heart of the fire, alerting by sounder or direct wiring into the building fire alarm, ensuring the right people are aware.



## The solution

This system use a proprietary continuous linear sensor tube that reliably detects and actuates release of the extinguishing agent using pneumatic technology. It is more flexible, space efficient and cost effective versus alternative mechanical or electronic systems.

## How it works?

### 1. Quick & Easy installation directly above high-risk cooking areas:

The flexible sensor tubing is easily installed directly inside the extractor hood - directly above cooking areas. When in service, the tubing is pressurized with dry nitrogen to 16 bar.

The dynamics of pressurization make the tubing more reactive to heat.

### 2. Early fire detection:

If a flame-up occurs, the heat of the fire causes the pressurized sensor tube to burst at the hottest spot (Approx. 175° C)

### 3. Instant suppression:

The sudden tube depressurization actuates the special pressure differential valve and instantly floods the cooking area with Class F extinguishing agent. The fire is quickly suppressed just moments after it began. Minimizing damage and downtime.




\*Red tubing for visualization only.  
System is installed with grey tubing

## Features

- Easy / Flexible installation
- Quick & Effective suppression
- Highly Dependable : No electricity or moving parts
- Highly economical

## LINE DIAGRAM

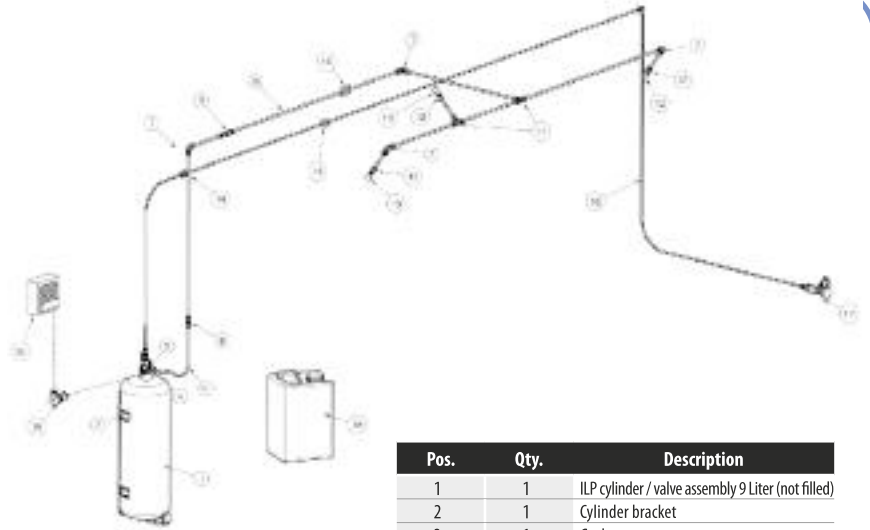

Pos.	Qty.	Description
1	1	ILP cylinder / valve assembly 9 Liter (not filled)
2	1	Cylinder bracket
3	1	Gasket
4	1	Tube fitting (nickel plated)
5	1	Steel hose
6	1	Tube fitting - straight union
7	4	Tube fitting - Elbow
8	1	Cross panel-fitting
9	6	Stainless steel tubing (1m)
10	4	Pipe bracket (Ø8mm)
11	2	Tube fitting - Tee
12	3	Tube fitting - straight G ¼"
13	3	Nozzle
14	1	Cross panel-fitting
15	20	Screw clips for tube attachment
16	1	FireDETEC Tube grey (10m)
17	1	Manuel release device
18	1	Pressure switch
19	1	FireDETEC® suppression agent (9 liter canister)

### OPTIONAL

20	1	Alarm box
----	---	-----------

ALL RIGHTS OF CHANGE REVERSED



## CERTIFICATION



## SPECIFICATION

<b>Extinguishing agents</b>	Class F	<b>Tube pressure</b>	16 bar	<b>Working temperature</b>	-20 °C to +60 °C
<b>Propellant</b>	Nitrogen	<b>Sensor tube burst temperature</b>	175 °C	<b>Cylinder volume</b>	12 Litres
<b>Volume of Extinguishing agent</b>	9 Litres	<b>Cylinder pressure</b>	16 bar	<b>Weight (filled)</b>	13 kg

**KANEX**<sup>®</sup>

**Designed, Manufactured & Marketed by:**  
**KANADIA FYR FYTER PVT. LTD.**  
An ISO 9001:2008 Certified Company

**HEAD OFFICE:**  
Office No.502, 5th Floor, A wing,  
Damji Shamji Corporate Square, Ghatkopar -Andheri Link Road,  
Laxmi Nagar,Ghatkopar (E) - 400 075

**WORKS:**  
Plot No.7 Paiki, Paras Industrial Estate,  
Near Garibshah Pir, Sihor - 364240 (Guj.).  
Ph. No.: +91 2846 231763



marketing@kanexfire.com  
www.kanexfire.com